


Macs Coral 1051/1081

The Coral bollards are suitable for use in both low and high frequency applications. The standard rising bollards come with self contained hydraulic pump and piston assembly for easy installation, with no special adjusting or calibration required, plus a manual override feature for use in the event of power failure.

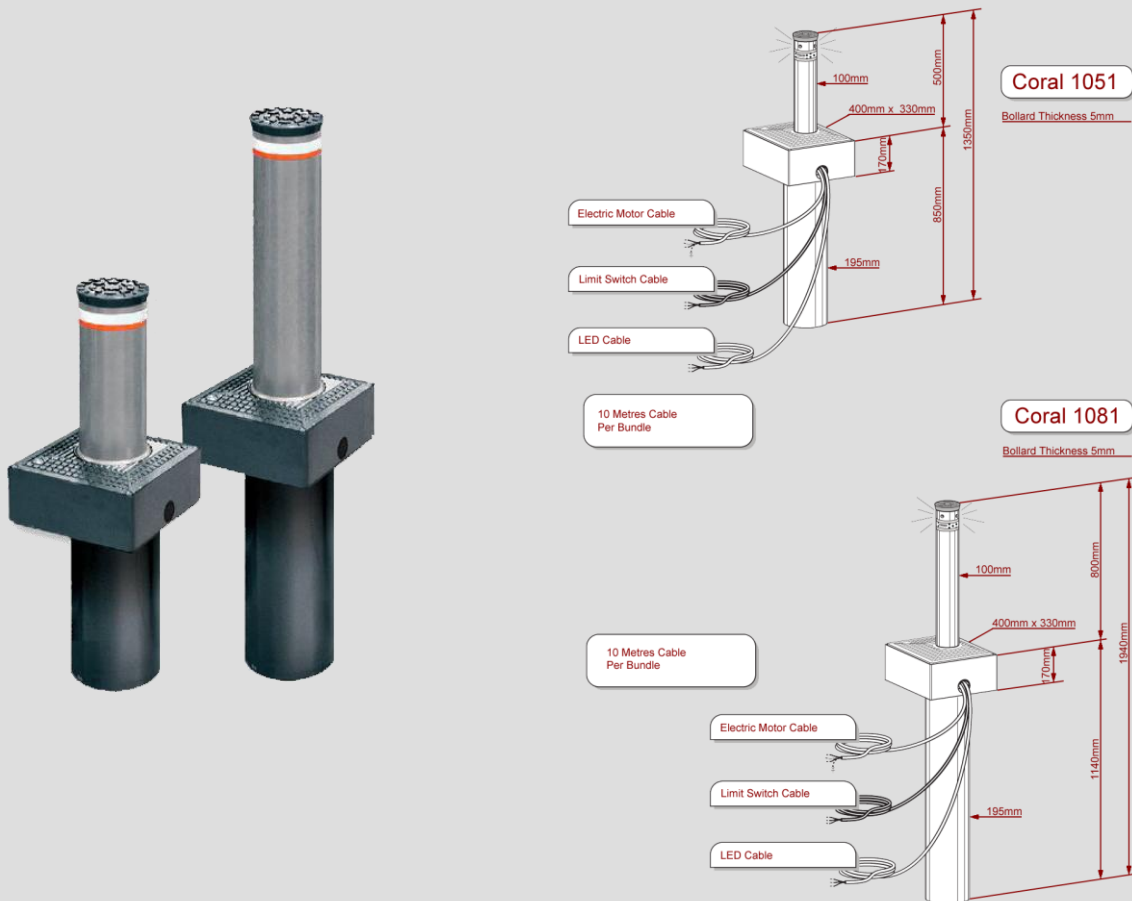

Coral 1051 Diameter	100mm
Coral 1081 Diameter	100mm
Coral 1051 Height	500mm
Coral 1081 Height	800mm
Coral 1051 Static Weight	86Kg
Coral 1081 Static Weight	104Kg
Coral 1051 Rising/Lowering Time	4s
Coral 1081 Rising/Lowering Time	6s
Cylinder Finish	Standard Grey Anthracite
Anti-Corrosion Treatment	Cataphoresis

Coral 1051	
Duty Cycle	Rise 4s – Dwell 30s – Lower 4s – Dwell 30s
Time of One complete Cycle	68s
Complete Cycles Per Hour	53 Per hour
Complete Cycles Per Year(8 Hours Per Day)	154,000

Coral 1081	
Duty Cycle	Rise 6s – Dwell 30s – Lower 6s – Dwell 30s
Time of One complete Cycle	72s
Complete Cycles Per Hour	50 Per Hour
Complete Cycles Per Year(8 Hours Per Day)	146,000