


## Macs Vigilo 2251/2281

The Vigilo bollards are suitable for use in both low and high frequency applications. The standard rising bollards come with self contained hydraulic pump and piston assembly for easy installation, with no special adjusting or calibration required, plus a manual override feature for use in the event of power failure.

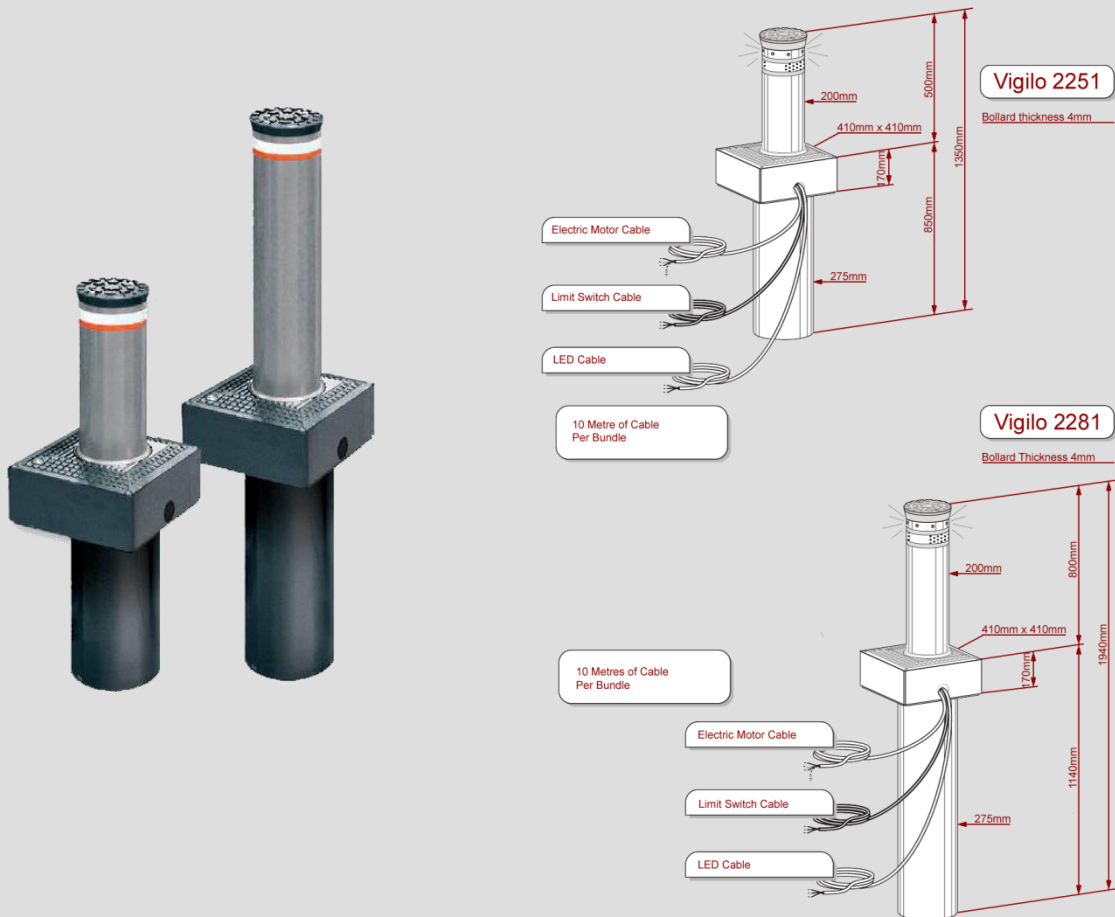

Vigilo 2251 Diameter	200mm
Vigilo 2281 Diameter	200mm
Vigilo 2251 Height	500mm
Vigilo 2281 Height	800mm
Vigilo 2251 Static Weight	102Kg
Vigilo 2281 Static Weight	131Kg
Vigilo 2251 Rising/Lowering Time	4s
Vigilo 2281 Rising/Lowering Time	6s
Cylinder Finish	Standard Grey Anthracite
Anti-Corrosion Treatment	Cataphoresis

Vigilo 2251	
Duty Cycle	Rise 4s – Dwell 30s – Lower 4s – Dwell 30s
Time of One complete Cycle	68s
Complete Cycles Per Hour	53 Per hour
Complete Cycles Per Year(8 Hours Per Day)	154,000

Vigilo 2281	
Duty Cycle	Rise 6s – Dwell 30s – Lower 6s – Dwell 30s
Time of One complete Cycle	72s
Complete Cycles Per Hour	50 Per Hour
Complete Cycles Per Year(8 Hours Per Day)	146,000